BriskHeat

GENERAL-PURPOSE FULL-COVERAGE DRUM/PAIL HEATERS & INSULATORS

- Insulated to maximize energy efficiency and reduce heat-up time
- Heater has easy-to-program digital controller Adjustable up to 160°F or 450°F (71°C or 232°C)
- Grounded for your safety meets NEC 427.23
- Ideal for use in indoor/dry environments IP4X
- 6 ft (1.8 m) long power cord with choice of plug or leads
- Even heat distribution and maximum energy efficiency
- Easy-to-use simple plug-and-play design
- Display is mounted on top of controller box for ► increased visibility and user convenience
- Reusable and rugged long service life
- Safe heater has unique 360° grounded heating element and cool-touch surface for your safety
- Ideal for a wide range of poly and metal drum/pail heating applications including viscosity control, freeze protection, temperature maintenance, melting of solids, and thermal mixing



and Digital Control



Single-Zone Model — Good general-purpose choice



Dual-Zone Model - Quickly melt viscous materials like molasses, syrups, etc.



Insulator Only Model - Pairs nicely with BriskHeat® silicone rubber or immersion drum heaters

800-848-7673 | 614-294-3376 | BriskHeat.com | bhtsales1@briskheat.com

GENERAL-PURPOSE FULL-COVERAGE DRUM/PAIL HEATERS & INSULATORS

Specifications

Outer Material: Silicone impregnated cloth Insulation: 1.0 in (25 mm) thick fiberglass Closure Method: Hook and loop fasteners

Maximum Exposure Temperature: 500°F (260°C)

IP Rating: Heater models: IP4X | Insulator model: IP20

Heater Specifications

Operating Temperature:

- 50° to 450°F (10° to 232°C) for Metal Drums
- 50° to 160°F (10° to 71°C) for Poly Drums

Digital Control: On/off controller. Display is either °F or °C depending on model

Heated Area:

- 55 and 30 gallon size (208 and 114 Liter): Lower two thirds
- 15 and 5 gallon size (61 and 19 Liter): Lower third

Heating Element: 360° grounded heating element for your safety

Dielectric Strength: Over 2000 volts

Power Cord: 6 ft (1.8 m) long

- 120 VAC: 3-prong grounded plug (NEMA 5-15P)
- 240 VAC: 3-prong grounded plug (NEMA 6-15P) or crimped ferrule leads

 $\mathsf{C}\mathsf{E}$ Models with crimped ferrule leads

Wide Range of Sizes












30 gal (114 l)

16 gal (61 l)

5 gal (19 l)

 $\textbf{Custom Sizes and Designs Available: Contact BriskHeat^{\texttt{@}} or your local distributor for more information.}$

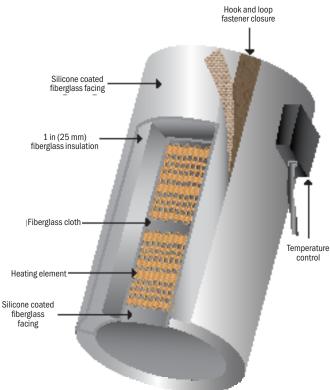

GENERAL-PURPOSE FULL-COVERAGE DRUM/PAIL HEATERS & INSULATORS

Ordering Information

Single Zone (FGDH Series) - For Metal Drums

120 VAC with °F display and NEMA 5-15P plug	Part No. 240 VAC with °F display and NEMA 6-15P plug	240 VAC with °C display and crimped ferrule leads	Insulator-only	Size Gal (I)	Diameter in (mm)	Height in (mm)	Number of Zones	Total Wattge
FGDHC55120DV	FGDHC55240DV	FGDHC55240DCV	FGDI55V	55 (208)	22.3 (566)	36.4 (924)	1	1600
FGDHC30120D	FGDHC30240D	FGDHC30240DC	FGDI30	30 (114)	18.6 (473)	29.5 (749)	1	1160
FGDHC15120D	FGDHC15240D	FGDHC15240DC	FGDI15	16 (61)	14.0 (355)	26.7 (678)	1	870
FGDHC5120D	FGDHC5240D	-		5 (19)	11.1 (282)	13.5 (343)	1	550

Single Zone (FGDH Series) - For Poly Drums

Part No.								
120 VAC with °F display and NEMA 5-15P plug	240 VAC with °F display and NEMA 6-15P plug	240 VAC with °C display and crimped ferrule leads	Insulator-only	Size Gal (I)	Diameter in (mm)	Height in (mm)	Number of Zones	Total Wattge
FGPDHC55120DV	FGPDHC55240DV	FGPDHC55240DCV	FGDI55V	55 (208)	22.3 (566)	36.4 (924)	1	770
FGPDHC30120D	-	-	FGDI30	30 (114)	18.6 (473)	29.5 (749)	1	553

Dual Zone (FGDDC Series) - For Metal Drums

Designed to quickly melt viscous materials like molasses, syrups, etc.


Part No.						
240 VAC with °F display and NEMA 6-15P plug	240 VAC with °C display and crimped ferrule leads	Size Gal (I)	Diameter in (mm)	Height in (mm)	Number of Zones	Total Wattage
FGDDC55240DV	FGDDC55240DCV	55 (208)	22.3 (566)	36.4 (924)	2	3200 (1600 per zone)

Accessories:

Part No.	Description		
FGDC55V	Drum Insulation Cover for 55 gal (208 I)		
FGDHSTRIPV	6 in (152 mm) wide strip that expands heater to fit up to a 24.2 in (615 mm) diameter drum. Strip is necessary for heater to fit around drums with removable lids.		



FGDC55V Drum Covers — Helps reduce heat loss and speed up heat-up time





FGDHSTRIPV Expansion Strip – Expands heater to fit up to 24.2 in (615 mm) diameter drums

Custom Sizes and Designs Available: Contact BriskHeat® or your local distributor for more information.

800-848-7673 | 614-294-3376 | BriskHeat.com | bhtsales1@briskheat.com