## **PALMER**

An economical solution to a wide-range of applications.

**Painted Steel Case Gauges** 

Model 15PB - 1-1/2" Gauge

Model 20PB - 2" Gauge

Model 25PB - 2-1/2" Gauge

Model 40PB - 4" Gauge

## **FEATURES**

- · Corrosion Resistant Black Painted Steel
- · Movement is low friction durable brass
- · Economical
- Low cost general purpose gauge for industrial use where high accuracy or rugged duty are not needed

## Models 15PB • 20PB • 25PB • 40PB Series Specifications

Case:	Corrosion Resistant Black Painted Steel. 1-1/2" (40mm), 2" (50mm), 2-1/2" (63mm), and 4" (100mm) diameter							
Fill:	Dry							
Window:	Acrylic. Instrument Glass on 4"							
Socket:	Brass or Phosphor Bronze							
Connection:	1/8" NPT on 1-1/2", 1/4" NPT on 2", 2-1/2" and 4" Optional 1/4" to 1/2" SS Adapter							
Bourdon Tube:	Brass or Phosphor Bronze							
Movement:	Low friction, durable Brass							
Pointer:	Painted Black Aluminum, non-adjustable							
Dial:	White Aluminum with black markings in accordance with ASME B40.1 -2005							
Accuracy:	15PB, 20PB, and 25PB: ± 2% mid-range. 40PB: ± 1.5% mid-range							
Range Availability:	PSI, Metric, and Dual Scales.							


-25° to +80°C / -13° TO 176°F





**Process** 

**Temperature Limits:** 

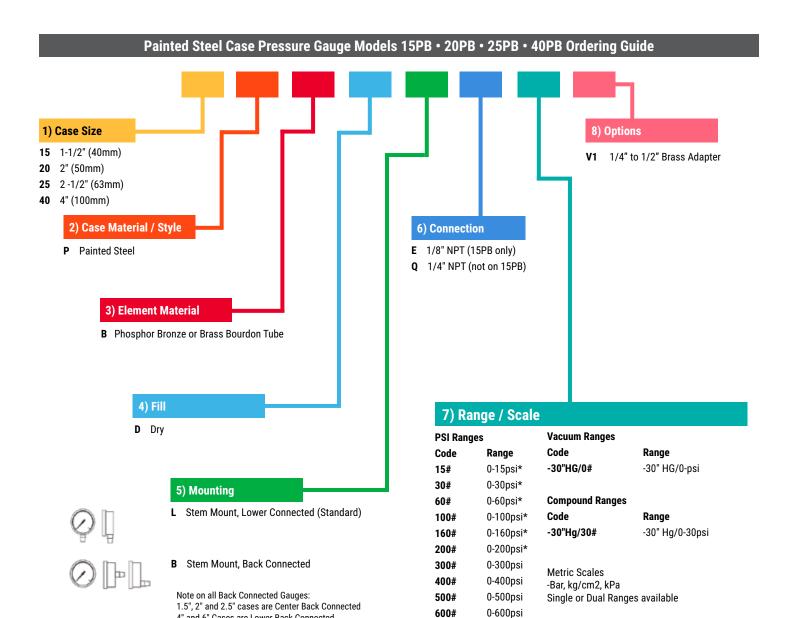

\* In Stock for 25PB

Please Note: Not all configurations are available! Minimum order quantities may apply. If not in Stock, minimum order is 100 pieces PER CASE SIZE AND RANGE.

Mounting style can be mixed within Case size and Range to achieve minimum.

## Example of a typical pressure gauge part number configuration:

4" and 6" Cases are Lower Back Connected

3.3.1.											
	25	P	В		D		L	Q		60#	
	Case Size	Case Material/Style	Element Material		Fill		Mounting	Connection		Range/ Scale	Options

