


Thermocouple T46

All Teflon Construction
w/Extension Cable or Micro-Connector

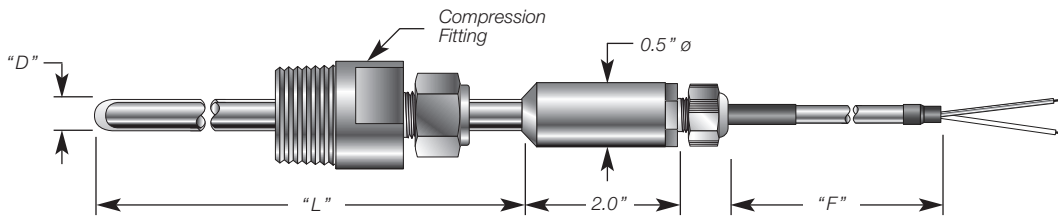

Custom Builder

MODEL 1 2 3 4 5 6 7 8 9 10

T46 - - - - - - - - - - -

BOX1 CODE	Temperature Range
L	Low temperature 200°C max. (392°F)

BOX5 CODE	Probe Diameter "D"
D	1/4" Diameter
E	5/16" Diameter (Std. construction)

BOX9 CODE	Lead Wire Insulation "F"		
	Each Cond.	Overall Jacket	Temp. Range
T	Teflon	Teflon	200°C (392°F)
TN	Teflon	None	260°C (500°F)
TM	Teflon	Alum. Mylar Drain Wire Teflon	200°C (392°F)
G	Glass	Glass	482°C (900°F)

BOX2 CODE	ANSI Type	Thermocouple Type
J	J	Iron-Constantan
K	K	Chromel-Alumel
T	T	Copper-Constantan
E	E	Chromel-Constantan


BOX6 CODE	Probe Material
T	PFA Teflon Clad 316SS Tube

BOX7 CODE	Probe Length "L"
----	In 0.1" increments Ex.: 065 =6.5" long

Note : 1. Specify wire length in inches (999" max.)
E.g.: **TF-060**=Teflon wire, 60" long
2. For SS Armor Cable over Extension.
Add "**A**" to code E.g.: **TA**
3. For SS Overbraided Cable over Extension.
Add "**S**" to code E.g.: **TS**

BOX3 CODE	Accuracy
A	Standard limits of error
B	Special limits of error

BOX8 CODE	Fitting Type
0	None
T12T	1/2" NPT, adjustable, Teflon
T34T	3/4" NPT, adjustable, Teflon

BOX4 CODE	Junction Type
1U	Ungrounded 

Note : For dual thermocouple change "1" to "2"

BOX10 CODE	Extension Cable Length "F"
----	In 0.1" increments Ex.: 065 =6.5" long